
▸DAXIS - Wall Mounted Axial Fan

DAXIS fans can be used when low volume required. It is easy to install to walls and windows. Low noise level and power usage makes it an ideal solution for commercial usage.




MOTOR INSULATION CLASS	F CLASS
MOTOR PROTECTION CLASS	IP 44
MOTOR EFFICIENCY CLASS	-
BODY MATERIAL	GALVANIZED SHEET METAL
BODY COATING	ELEKTRO-STATIC POWDER COATING
IMPELLER MATERIAL	GALVANIZED SHEET METAL
DUTY CYCLE	IEC Duty Cycle-S1
WORKING TEMPERATURE	-20 - +50 °C
STANDARDS	EN 60204-1

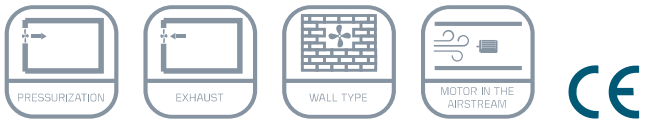

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	SPEED SWITCH MODEL	REVOLUTION (rpm)	FLOW RATE (m^3/h)	NOISE LEVEL (dB(A))
DAXIS 200	230	50	70	KHA 2,5 A	2.650	680	50
DAXIS 250	230	50	100	KHA 2,5 A	2.700	1.500	52
DAXIS 300	230	50	163	KHA 2,5 A	2.550	2.025	54
DAXIS 350	230	50	240	KHA 2,5 A	2.250	3.110	58
Values are for 0 Pa.							

DRAWING

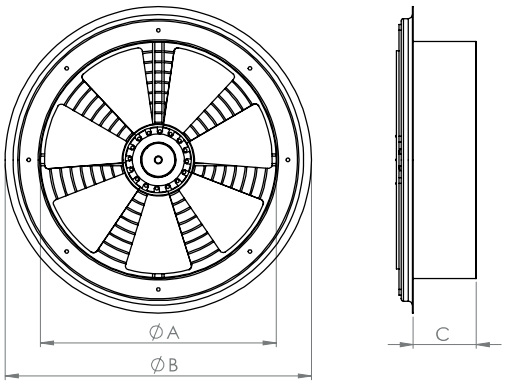

MODEL	A (mm)	B (mm)	C (mm)
DAXIS 200	197	290	70
DAXIS 250	247	340	70
DAXIS 300	297	390	80
DAXIS 350	347	440	80