

►KDAXIS - Wall Mounted Axial Fan With Square Body

KDAXIS fans can be used when low volume required. It is easy to install to walls and windows. Low noise level and power usage makes it an ideal solution for commercial usage.




MOTOR INSULATION CLASS	F CLASS
MOTOR PROTECTION CLASS	IP 44
MOTOR EFFICIENCY CLASS	-
BODY MATERIAL	GALVANIZED SHEET METAL
BODY COATING	ELEKTRO-STATIC POWDER COATING
IMPELLER MATERIAL	GALVANIZED SHEET METAL
DUTY CYCLE	IEC Duty Cycle-S1
WORKING TEMPERATURE	-20 - +50 °C
STANDARDS	EN 60204-1



MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	SPEED SWITCH MODEL	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))
KDAXIS 200	230	50	70	KHA 2,5 A	2.650	680	50
KDAXIS 250	230	50	100	KHA 2,5 A	2.700	1.500	52
KDAXIS 300	230	50	163	KHA 2,5 A	2.550	2.025	54
KDAXIS 350	230	50	240	KHA 2,5 A	2.250	3.110	58

Values are for 0 Pa.

DRAWING

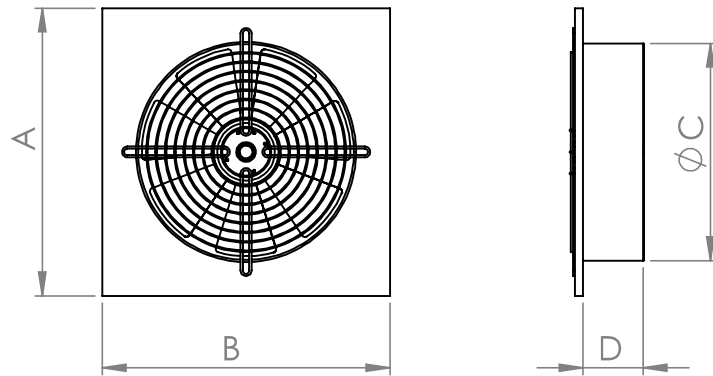

MODEL	A (mm)	B (mm)	C (mm)	D (mm)
KDAXIS 200	300	300	197	40
KDAXIS 250	350	350	247	40
KDAXIS 300	400	400	297	40
KDAXIS 350	450	450	347	40