

► KAF - Mixed Flow Plastic In-line Fan

KAF fans with mixed flow impeller and efficient motor can be used in your ventilation systems. V0 non-flammability has flame resistance in its class






MOTOR INSULATION CLASS	F CLASS
MOTOR PROTECTION CLASS	IP 44
MOTOR EFFICIENCY CLASS	-
BODY MATERIAL	PLASTIC
BODY COATING	V0
IMPELLER MATERIAL	PLASTIC
DUTY CYCLE	IEC Duty Cycle-S1
WORKING TEMPERATURE	-20 - +50 °C
STANDARDS	EN 60204-1



MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	SPEED SWITCH MODEL	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))
KAF 100	230	50	54	KHA 2,5 A	2.460	234	31
KAF 125	230	50	56	KHA 2,5 A	2.560	337	32
KAF 150	230	50	75	KHA 2,5 A	2.490	504	33
KAF 160	230	50	75	KHA 2,5 A	2.490	560	33
KAF 200	230	50	111	KHA 2,5 A	2.410	1.012	36
KAF 250	230	50	280	KHA 2,5 A	2.460	1.350	38
KAF 315	230	50	476	KHA 2,5 A	2.476	1.970	42

Values are for 0 Pa.

DRAWING

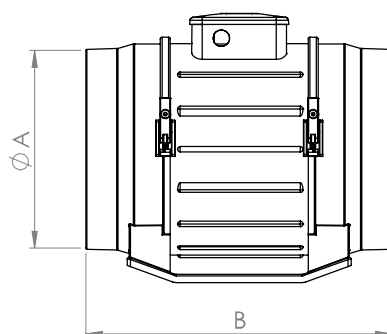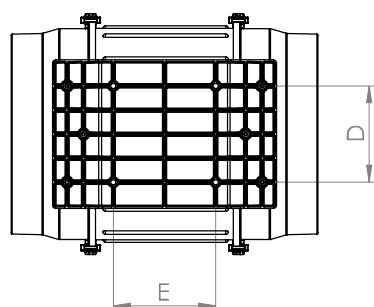

MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
KAF 100	96	306,5	215	60	80
KAF 125	121	260	215	60	80
KAF 150	146	290,5	242	60	80
KAF 160	156	271	242	60	80
KAF 200	191	300	263	94	100
KAF 250	246	393	325	110	140
KAF 315	310	450	420	175	180