

► AXIS - Axial In-line Duct Fan

AXIS fans can be used when low volume ventilation needs. It is easy-to-install, has low noise level and power usage.



PRESSURIZATION



EXHAUST



DUCT TYPE



MOTOR IN THE AIRSTREAM




MOTOR INSULATION CLASS	F CLASS
MOTOR PROTECTION CLASS	IP 44
MOTOR EFFICIENCY CLASS	-
BODY MATERIAL	GALVANIZED SHEET METAL
BODY COATING	ELEKTRO-STATIC POWDER COATING
IMPELLER MATERIAL	GALVANIZED SHEET METAL
DUTY CYCLE	IEC Duty Cycle-S1
WORKING TEMPERATURE	-20 - +50 °C
STANDARDS	EN 60204-1



MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	SPEED SWITCH MODEL	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))
AXIS 200	230	50	70	KHA 2,5 A	2.650	680	50
AXIS 250	230	50	100	KHA 2,5 A	2.700	1.500	52
AXIS 300	230	50	163	KHA 2,5 A	2.550	2.025	54
AXIS 350	230	50	240	KHA 2,5 A	2.250	3.110	58

Values are for 0 Pa.

DRAWING

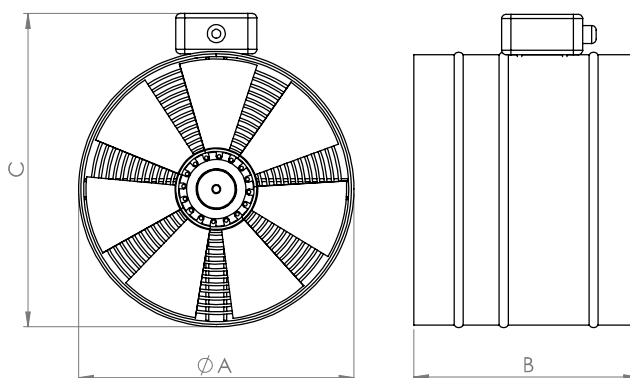

MODEL	A (mm)	B (mm)	C (mm)
AXIS 200	197	250	247
AXIS 250	247	250	297
AXIS 300	297	250	347
AXIS 350	347	350	397