


► YUF - Circular Bathroom Fan

High quality PP materials are used in the production of YUFs. They can be used in bathroom walls or windows.



PRESSURIZATION



EXHAUST



DUCT TYPE



MOTOR IN THE AIRSTREAM



MOTOR INSULATION CLASS	F CLASS
MOTOR PROTECTION CLASS	IP 25
MOTOR EFFICIENCY CLASS	-
BODY MATERIAL	ABS PLASTIC
BODY COATING	-
IMPELLER MATERIAL	ABS PLASTIC
DUTY CYCLE	IEC Duty Cycle-S1
WORKING TEMPERATURE	-20 - +50 °C
STANDARDS	EN 60204-1


MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))
YUF 100	230	50	14	2,800	107	35
YUF 125	230	50	18	2,800	190	36
YUF 150	230	50	22	2,800	300	38

Values are for 0 Pa.

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))
YUF 100K	230	50	14	2,800	107	35
YUF 125K	230	50	18	2,800	190	36
YUF 150K	230	50	22	2,800	300	38

Values are for 0 Pa.

DRAWING

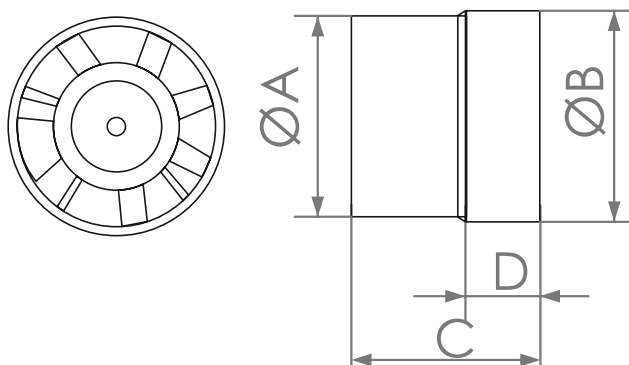

MODEL	A (mm)	B (mm)	C (mm)	D (mm)
YUF 100	100	103	80	30
YUF 125	125	128	87	30
YUF 150	150	153	101	35