


► CRAD - Roof Mounted Horizontal Discharge Centrifugal Fan

CRAD fans can be used in low to medium volume projects and can be mounted on the roof. Easy-to-install with long-lasting motor and efficient impeller.




MOTOR INSULATION CLASS	F CLASS
MOTOR PROTECTION CLASS	IP 44
MOTOR EFFICIENCY CLASS	-
BODY MATERIAL	GALVANIZED SHEET METAL
BODY COATING	ELECTRO-STATIC POWDER COATING
IMPELLER MATERIAL	ALUMINIUM
DUTY CYCLE	IEC Duty Cycle-S1
WORKING TEMPERATURE	-20 - +50 °C
STANDARDS	EN 60204-1



MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	SPEED SWITCH MODEL	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))
CRAD 190	230	50	90	KHA 2,5 A	2.600	520	50
CRAD 225	230	50	104	KHA 2,5 A	2.675	950	50
CRAD 250	230	50	130	KHA 2,5 A	2.685	1.150	55
CRAD 280	230	50	180	KHA 2,5 A	2.615	2.000	60
CRAD 355	230	50	185	KHA 2,5 A	1.365	2.350	52
CRAD 400	230	50	380	KHA 2,5 A	1.365	3.400	55
CRAD 450	230	50	690	KHA 2,5 A	1.365	4.900	60
CRAD 500	230-380	50	1.080	KHA 5 A - 1,10 kW	1.365	7.000	63
CRAD 560	380	50	1.670	2,20 kW	1.365	9.300	70

Values are for 0 Pa.

DRAWING

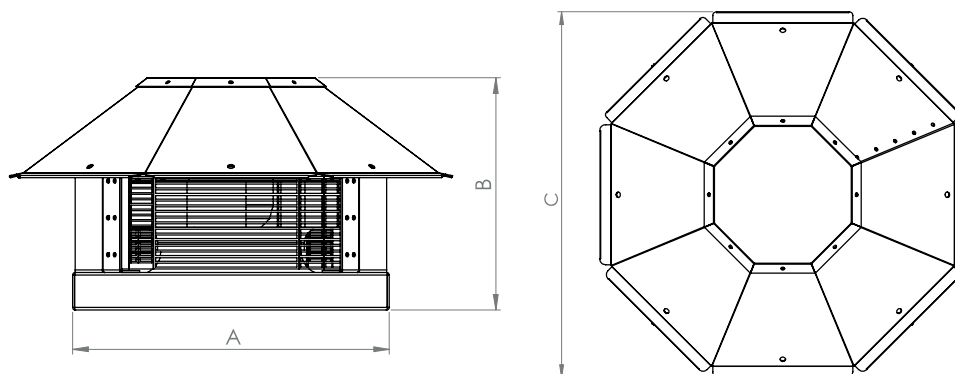

MODEL	A (mm)	B (mm)	C (mm)
CRAD 190	250	220	340
CRAD 225	336	247	471
CRAD 250	355	252	500
CRAD 280	370	256	523
CRAD 355	450	337	640
CRAD 400	450	367	640
CRAD 450	550	444	820
CRAD 500	600	500	860
CRAD 560	630	510	920