


► BAF – Bathroom Fan



High quality PP materials are used in the production of BAFs. They can be used in bathroom walls or windows.



MOTOR INSULATION CLASS	F CLASS
MOTOR PROTECTION CLASS	IP 25
MOTOR EFFICIENCY CLASS	-
BODY MATERIAL	ABS PLASTIC
BODY COATING	-
IMPELLER MATERIAL	ABS PLASTIC
DUTY CYCLE	IEC Duty Cycle-S1
WORKING TEMPERATURE	-20 - +50 °C
STANDARDS	EN 60204-1


MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))
BAF 100	230	50	14	2,800	97	35
BAF 125	230	50	16	2,800	183	36
BAF 150	230	50	16	2,800	290	38

Values are for 0 Pa.

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))
BAF 100K	230	50	14	2,800	97	35
BAF 125K	230	50	16	2,800	183	36
BAF 150K	230	50	16	2,800	290	38

Values are for 0 Pa.

DRAWING

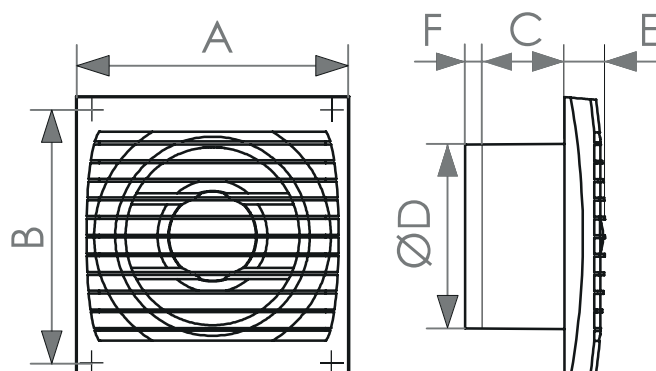

MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
BAF 100	150	135	55	100	22	7
BAF 125	175	160	61	125	23	8,5
BAF 150	200	185	62	150	24	10